Programme & Poster Abstracts

OPERA Workshop — Junior Research Days (first part)

28 - 29 September 2026

La Cristalera, Carretera M-611 km 10
28792 Miraflores de la Sierra, Madrid

Chair: Celia Polop (UAM)
Scientific committee: François Liénard (ESRF), Natalia Kwiatek-Maroszek (ALBA), Carmen Morant (UAM)

Funded by the European Union

OPERA Project (Horizon EU) · GA 101103834

OPERA Workshop — Programme Overview

Monday 28 – Tuesday 29 September 2026

La Cristalera, Miraflores de la Sierra, Madrid

La Cristalera, Miraflores de la Sierra (Madrid) — workshop venue

Monday 28 September

Morning walk / Jog club / Breakfast	
09:00	**Ice-Breaker**
09:30	**Ice-Breaker**
10:00	**Ice-Breaker**
10:30	***Coffee break***
11:00	**Redox flow batteries** *Ange Maurice*
11:30	**Nano X-ray Diffraction in Synchrotrons** *François Liénard*
12:00	**AFM-CAFM-KPFM** *Pablo Hernández Martín*
12:30	**Applications of High-Energy XRD for Stress Analysis and Lithium Diffusion in Solid-State Batteries** *Karol Vegso*
13:00	***Lunch***
13:30	***Lunch***
14:00	**Free time**
14:30	**Free time**
15:00	**Bus departure to Buitrago**
16:30	**Kayak trip at Buitrago**
19:30	**Bus to La Cristalera**
20:30	***Dinner***

Tuesday 29 September

Morning walk / Jog club / Breakfast	
09:00	**Impedance spectroscopy and distribution of relaxation times for electrochemical insight into battery behavior** *Jake Huang*
09:30	**LEEM-PEEM** *Natalia Kwiatek-Maroszek*
10:00	**A Computational Phase-field Analysis of Dendrite Growth at the Li-LLZO Interface** *Yuheng Du*
11:00	***Coffee break***
11:00	**PLD and thin-film batteries | HAXPES** *Andrea Marchetti*
11:30	**Focused ion beam-secondary ion mass spectrometry imaging** *Sayantan Sharma*
12:30	**Poster session**
12:30	**Poster session**
13:00	***Lunch***
13:30	***Lunch***
14:00	**Free time / Group hike**
14:30	**Free time / Group hike**
15:00	**Free time / Group hike**
16:30	**Free time / Group hike**
19:30	**Free time / Group hike**
20:30	***Dinner***

List of Posters

Yuheng Du 1
A Computational Phase-field Analysis of Dendrite Growth at the Li-LLZO Interface

Sayantan Sharma 2
High-resolution chemical imaging of ion transport in hybrid polymer electrolytes: a FIB-SIMS workflow

Zachary Warren 3
High throughput EIS processing via online machine learning

Yondriel de Armas Figueroa 4
Raman Spectroscopy for Ferroelastic and Polymorphic Transitions study in ferroelectric ceramics

Jesus Díaz-Sánchez & Ange A. Maurice 5
Operando ion beam analysis characterization of LLZTO-based solid-state batteries

Soundarya Neelanarayanan 6
Development of an in-house operando XRD technique for the observation of lithium-ion diffusion in NMC-based SSB

Karol Vegso 7
Evolution of Fabrication-Induced Residual Stresses in Solid-State Batteries

Emma López Ortín 8
Electrochemical cycling and multitechnique characterization of NaCoO2 cathodes grown by pulsed laser deposition

Alejandro Ramo-Irurre 9
Operando Synchrotron FTIR at the MIRAS Beamline Reveals Structural-Water Dynamics in Prussian Blue Analogues

Andrea Marchetti 10
Thin-film components and interfacial studies for sodium solid-state batteries

Pablo Hernández-Martín 11
Determination of the local chemical strain on single crystal LCO by c-AFM

Kalina Fornal 12
Low-energy electron microscopy study of the growth of M2Mo3O8 (M = Mn, Fe) on Mo (110)

A Computational Phase-field Analysis of Dendrite Growth at the Li-LLZO Interface.

*Yuheng Du, Tao Chen, Qiong Cai**
School of Chemistry and Chemical Engineering, University of Surrey, Guildford, GU2 7XH, Surrey, United Kingdom
Corresponding author: *q.cai@surrey.ac.uk*

All-solid-state lithium batteries (ASSLBs) offer the prospect of safer, higher-energy energy storage by replacing flammable liquid electrolytes with non-flammable solid electrolytes. However, their development is constrained by lithium-metal dendrites, which can nucleate at the lithium/solid-electrolyte interface, propagate through the electrolyte, and ultimately cause internal short circuits. While external stack pressure is commonly applied to improve interfacial contact and cell stability, the coupled roles of interfacial reaction kinetics, applied voltage, and pressure in controlling dendrite propagation remain incompletely understood.

Here, a computational phase-field framework is used to examine lithium dendrite growth at the lithium/garnet-type electrolyte interface, where the solid electrolyte is Li7La3Zr2O12 (LLZO). The model considers a polycrystalline LLZO electrolyte and assumes preferential lithium propagation along grain-boundary pathways, which are commonly more susceptible to lithium penetration than grain interiors. A systematic parameter study of 125 simulations was performed by varying the applied voltage, external stacking pressure, and interfacial electrochemical reaction rate. The resulting lithium morphology and propagation behaviour were evaluated using the evolving dendrite area ratio and the connectivity of lithium-filled grain-boundary pathways.

The simulations identify four distinct propagation stages governed by the combined electrochemical and mechanical driving forces. At low applied voltage, lithium advances primarily through a single grain-boundary channel, with limited lateral branching. At intermediate voltage, two pressure-responsive branching regimes emerge: an initial branching regime in which stack pressure can substantially constrain lithium expansion, followed by a more developed branching regime in which pressure still suppresses dendrite growth but with progressively reduced effectiveness. At high voltage, lithium forms a fully percolated network across the simulated electrolyte domain. In this regime, propagation is dominated by the electrical driving force, and increases in stack pressure provide little further suppression.

The voltage range over which pressure is effective is strongly dependent on the interfacial reaction rate. As the reaction rate increases, the pressure-responsive window shifts to lower applied voltages and becomes narrower, demonstrating that faster lithium-deposition kinetics promote branching and percolation under less severe electrical driving conditions. Conversely, lowering the interfacial reaction rate delays the onset of extensive dendrite propagation and preserves a wider operating range in which pressure can meaningfully regulate dendrite morphology. Across all 125 simulated conditions, reducing the interfacial reaction rate provides substantially greater suppression of lithium penetration than increasing external stacking pressure.

These results indicate that pressure management alone is unlikely to deliver robust dendrite resistance under high-voltage operation. Instead, stabilising the lithium/LLZO interface and moderating local charge-transfer kinetics should be treated as the principal design strategy, with stack pressure used as a complementary control variable. The framework provides experimentally testable predictions for coupled electrochemical–mechanical measurements and supports the rational design of interfacial coatings, engineered grain boundaries, and operating protocols for more reliable ASSLBs.

High-resolution chemical imaging of ion transport in hybrid polymer electrolytes: a FIB-SIMS workflow

Sayantan Sharma[1], *Santhana Eswara*[1]
[1]*Advanced Instrumentation for Nano-Analytics (AINA)*
Luxembourg Institute of Science and Technology
41, rue du Brill, L-4422 Belvaux, Luxembourg
Corresponding author: *sayantan.sharma@list.lu*

Hybrid polymer electrolytes composed of ceramic particles embedded in polymer matrix are promising as electrolytes for next-generation solid-state batteries as they combine the complementary advantages of both components [1]. By optimization of the design principles, they can achieve adequate Li^+ conductivity, high mechanical strength, a broad electrochemical stability window, good interfacial contact, and effective dendrite suppression. Such optimization requires detailed knowledge about the correlation between ion transport and parameters such as current density, temperature, and chemical composition. Breakthroughs in analytical techniques are needed to image sub-micron and nanoscale ion transport in operando conditions. Focused ion beam-secondary ion mass spectrometry (FIB-SIMS) is a valuable nanometrological technique for this purpose, as it enables the detection and high-resolution chemical imaging (sub 20nm spatial resolution) of light elements such as Li [2]. Furthermore, FIB-SIMS can distinguish isotopes of an element, making ^6Li isotope labelling a powerful approach for investigating ion transport and related bottlenecks in solid electrolytes [3]. Here, we present the steps toward the development of a workflow for real-time imaging of ion transport in hybrid polymer electrolytes across a broad temperature range. Building on our previously reported operando methodology [3], this workflow integrates controlled heating and cooling of solid-state battery samples between −20°C and +80°C with simultaneous electrochemical operation and FIB-SIMS analysis. This approach will enable a systematic investigation of how parameters such as analysis temperature, ceramic filler size, and filler loading influence ionic conductivity and ion-transport pathways in hybrid polymer electrolytes. The resulting insights will support the development of hybrid polymer electrolytes with enhanced electrochemical performance.

References

[1] Yu et al. Energy Storage Materials 34 (2021).
[2] De Castro et al. Analytical Chemistry 94 (2022).
[3] Sharma et al. Electrochimica Acta 536 (2025).

High throughput EIS processing via online machine learning

Zachary Warren[1], *Carolina Rosero-Navarro*[1]
[1]*Instituto de Cerámica y Vidrio - CSIC*
Corresponding author: *warren@icv.csic.es*

Electrochemical impedance spectroscopy (EIS) is one of the most information-rich non-destructive diagnostics for batteries, yet its use at scale is limited by slow, expert-dependent analysis. Equivalent circuit model (ECM) fitting is sensitive to model choice and initial guesses, distribution of relaxation times (DRT) inversion depends on regularization choices, and machine-learning (ML) models trained offline degrade when chemistry, cell format, or operating conditions drift. Here we present NEVORA, an end-to-end platform that ingests impedance spectra from multichannel potentiostats and processes them automatically through three coupled layers. First, every spectrum is screened by Kramers–Kronig validation to reject non-stationary or noise-corrupted data. Second, a physics-based layer performs automated ECM selection and fitting in parallel with regularized DRT deconvolution, extracting interpretable parameters (ohmic, interphase, charge-transfer, and diffusion contributions) and their characteristic time constants; cross-checking ECM parameters against DRT peak assignments provides an internal consistency test that reduces the ambiguity inherent to either method alone. Third, validated spectra and extracted features, including polar representations (|Z|, φ) that we previously showed outperform Cartesian inputs for ML, stream into a live-training pipeline that incrementally updates state-of-charge (SOC) and state-of-health (SOH) models as new data arrive and reports an uncertainty estimate with every prediction. We demonstrate the platform on thousands of spectra spectra from sulfide chemistries and model chemistries cycled under various conditions. Live-trained models reached SOH and SOC errors of < 1% MAE on held-out cells. By converting raw impedance into validated, physically interpretable, and continuously improving diagnostics, NEVORA lowers the barrier to deploying EIS in cell development, quality control, and battery-management applications.

Raman Spectroscopy for Ferroelastic and Polymorphic Transitions study in ferroelectric ceramics

Yondriel de Armas Figueroa[1], J. Portelles[1,2], Rene López-Noda[1], J. Fuentes[2], H'Linh H'mŏk[4,5], Jesús M. Siqueiros[3], Z. I. Bedolla-Valdez[6], M. P. Cruz[3]

[1]*Institute of Cybernetics, Mathematics and Physics, CITMA, Vedado, Havana, Cuba.*
[2]*Faculty of Physics, University of Havana, San Lázaro y L, Havana 10400, Cuba.*
[3]*Center for Nanoscience and Nanotechnology, National Autonomous University of Mexico, Ensenada, B.C., Mexico, 22860.*
[4]*Computational Laboratory for Advanced Materials and Structures, Advanced Institute of Materials Science, Ton Duc Thang University, Ho Chi Minh City, Vietnam.*
[5]*Faculty of Applied Sciences, Ton Duc Thang University, Ho Chi Minh City, Vietnam.*
[6]*Higher Technological Institute of Uruapan, Carr. Uruapan-Carapan No. 5555, Col. La Basilia, 60015 Uruapan, Mich., Mexico.*
Corresponding author: *yondriel.dearmas@estudiante.uam.es*

In the present work, Raman spectroscopy was used to study ferroelastic and polymorphic phase transitions in the compositions $Pb(Zr_{0.53}Ti_{0.47})O_3$:Gd (PZT53/47:Gd) and $K_{0.44}Na_{0.52}Li_{0.04})_{0.97}La_{0.01}Nb_{0.9}Ta_{0.1}O_3$ ($KNNLiTaLa_{0.01}$), respectively. Raman spectra of both samples were measured as a function of temperature, and the spectra were subsequently analyzed both qualitatively and quantitatively. The exact temperature of the ferroelastic transition in PZT53/47:Gd was determined, the vibrational mode associated with the ferroelastic phase transition was identified, and it was confirmed that the presence of Gd^{3+} in the structure induces the occurrence of this transition. It was also determined that the ferroelastic phase transition is of the pseudoproper type and, by applying the hard-mode spectroscopy approach, it was classified as a second-order transition. For the $KNNLiTaLa_{0.01}$ composition, the temperature interval in which the phase transition occurs was accurately determined. Furthermore, the transition was classified as a second-order phase transition using hard-mode spectroscopy.

References

[1] Y. de Armas Figueroa et al. (2021): An analysis of the ferroelastic transition in $PbZr_{0.53}Ti_{0.47}O_3$ through the elastic stiffness constant, Phase Transitions.

[2] Y. de Armas Figueroa et al. (2022): Study of a polymorphic phase transition in $KNNLiTaLa_{0.01}$ by Raman spectroscopy, Phase Transitions.

Operando ion beam analysis characterization of LLZTO-based solid-state batteries

Bouthayna Alrifai[1], Arturo Galindo[2], Jesus Díaz-Sánchez[3,4], Andrea Marchetti[2], Y. de Armas Figueroa[2], Ange A. Maurice[1], Sunil Kumar[1], Xinhao Yang[5], Carolina Rosero-Navarro[5], Gastón García López[1], Celia Polop[3,4], Enrique Vasco[2]

[1]*Centro de Microanálisis de Materiales, Universidad Autónoma de Madrid, 28049, Madrid, Spain*
[2]*Instituto de Ciencia de Materiales de Madrid, Consejo Superior de Investigaciones Científicas (CSIC), Madrid, 28049, Spain*
[3]*Departamento de Física de la Materia Condensada, Universidad Autónoma de Madrid, 28049, Spain*
[4]*Instituto Universitario de Ciencia de Materiales Nicolás Cabrera (INC), Universidad Autónoma de Madrid, 28049, Spain*
[5]*Instituto de Cerámica y Vidrio (CSIC), Madrid, 28049, Spain*
Corresponding author: *ange.maurice@uam.es*

Solid-state batteries (SSBs) offer transformative potential with their higher energy density, enhanced safety, and extended longevity. However, their performance is often limited by interfacial challenges, including degradation, mechanical failure, and lithium transport issues at critical interfaces with a solid electrolyte such as LLZTO (Lithium Lanthanum Zirconium Tantalum Oxide). These interfacial processes, such as lithium accumulation or depletion, contact loss, and dendrite formation, directly influence ionic transport, interfacial resistance, and cycling stability, ultimately determining the battery's overall performance and lifespan.

To address the lack of direct insight into these dynamic interfacial phenomena, this study employs operando Rutherford Backscattering Spectrometry (RBS) and Nuclear Reaction Analysis (NRA) with 3 MeV protons to visualize and quantify lithium distribution and depth profile in real time during battery cycling. Furthermore, we present the first operando NRA/RBS characterization results, enabling real-time tracking of lithium migration.

This work underscores the critical role of operando IBA techniques in advancing the understanding of interfacial processes in SSBs, paving the way for optimized designs and improved performance.

Development of an in-house operando XRD technique for the observation of lithium-ion diffusion in NMC-based SSB

Soundarya Neelanarayanan[1], *Karol Vegso*[1,2], *Peter Siffalovic*[1,2], *Muhammad Arslan Raza*[1], *Poongodi Ayyanusamy*[1]

[1]*Institute of Physics, Slovak Academy of Sciences, Dúbravská cesta 9, 845 11 Bratislava, Slovakia*
[2]*Centre for Advanced Materials Application, Slovak Academy of Sciences, Dúbravská cesta 5817/9, 841 04,Bratislava, Slovakia*

Corresponding author: *soundarya.neelanarayanan@savba.sk*

Study and observation of the lithium-ion diffusion is essential for a deeper understanding and the development of high-loading solid-state batteries. The time-dependent lithium-ion diffusion was observed using advanced, high-power X-ray sources such as synchrotrons, thereby tracking structural changes in the cathode mixture [1]. We have developed an in house operando XRD technique using a state-of-the-art high-brilliance laboratory microfocus X-ray source (Ag Kα radiation) and a highly sensitive CdTe 2D X-ray detector operating in transmission mode. Lithium diffusion in cathode active material was observed using an operando setup that utilised wide-angle X-ray scattering (WAXS) for real-time analysis of the structural changes due to redox reactions during battery cycling under laboratory conditions. Two SSB batteries were prepared with carbon black (CB) as the X-ray window on the current collector side, NMC811 cathode with two different catholytes, Li6PS5Cl (slow) and Li5.5PS4.5Cl1.5 (fast), Li6PS5Cl (LPSCl) as electrolyte and Li-In as anode, were built. The lithium-ion diffusion was observed at the two cathode interfaces (CB-NMC & NMC-LPSCl), during cycling at different C-rates. The XRD data, combined with electrochemical data, revealed the homogeneous reaction in the cathode mixture for the fast LPSCl and delayed lithium-ion diffusion between the two probed interfaces for slow LPSCl.

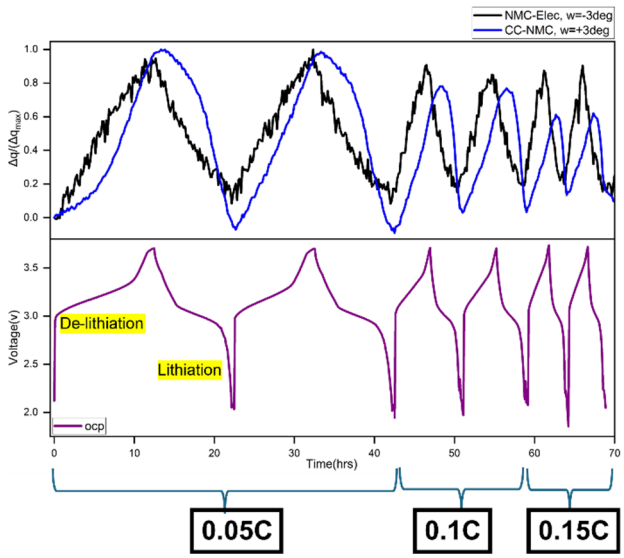

Figure 1. *Evolution of normalized NMC 101 diffraction peak position for the NMC/solid electrolyte interface (black curve) and the CC/NMC interface (blue curve) vs. battery cell potential during de-lithiation and lithiation for slow LPSCl.*

References

[1] J. Hartel, L. Ketter, E. Schlautmann, E. Šimon, K. Végsö, P. Ayyanusamy, T. Bernges, P. Siffalovic, W. G. Zeier, Angew. Chem. Int. Ed. 65 (20) (2026), e2890151.
[2] J. Lim, T. Hwang, D. Kim, M. Park, K. Cho, M. Cho, Sci. Rep. 7 (2017), 39669.

Evolution of Fabrication-Induced Residual Stresses in Solid-State Batteries

Karol Vegso[1,2], Peter Siffalovic[1,2], Erik Simon[2,3], Poongodi Ayyanusamy[1], Juraj Todt[4], Jozef Keckes[4], Norbert Schell[5]

[1]*Institute of Physics, Slovak Academy of Sciences, Dúbravská cesta 9, 845 11 Bratislava, Slovakia*
[2]*Centre for Advanced Materials Application, Slovak Academy of Sciences, Dúbravská cesta 5817/9, 841 04,Bratislava, Slovakia*
[3]*Institute of Materials and Machine Mechanics, Slovak Academy of Sciences, Dúbravská cesta 9/6319, 845 13 Bratislava, Slovakia*
[4] *Montanuniversität Leoben, Department Materials Science, Jahnstrasse 12, A-8700 Leoben, Austria*
[5]*Helmholtz-Zentrum Hereon, Max-Planck-Str. 1, 21502, Geesthacht, Germany*

Corresponding author: *karol.vegso@savba.sk*

A gradual uniaxial compression procedure fabricates solid-state batteries (SSBs) by applying fabrication pressures, concluding with the stack pressure. The primary goal of the fabrication pressures is to reduce the porosity in the anode, solid electrolyte (SE), and cathode powders. In contrast, the stack pressure ensures optimal contact at the interfaces, which facilitates the proper transport of Li ions through these interfaces and preserves high ionic conductivity in the battery stack. Here, we report residual stress measurements using $\sin^2\psi$ method in a solid-state battery containing LPSCl. [1] The LPSCl SE was compressed up to 400 MPa. However, the evaluated axial compressive stress was only 200 MPa. This difference is due to LPSCl being confined within the PEEK and steel parts of the battery cell. Therefore, the LPSCl pressing follows a triaxial stress state consisting of the axial stress (σ_x) and the constrained radial stresses (σ_r=σ_ϑ). Using the $\sin^2\psi$ method, the difference between the axial and radial stresses is measured in the solid-state battery. After reaching an external pressure of 400 MPa, the LPSCl was released and exhibited significant tensile strain due to the spring-back effect induced by the expansion of Ar gas in the compressed pores of the SE powder. Additionally, the study indicates that applying a stack pressure of 50 MPa, commonly used in the literature, does not induce axial compressive strain in the battery stack; instead, it returns it to its initial zero MPa state.

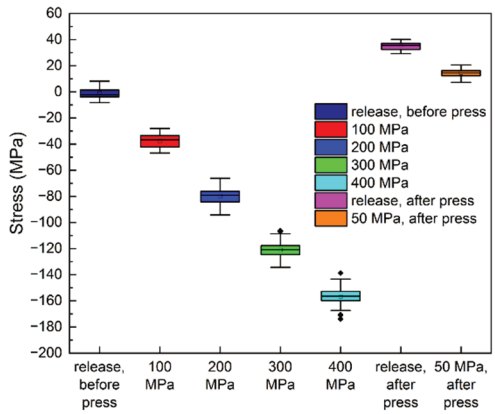

Figure 1. *The figure shows the evolution of difference between axial and radial stress, calculated from elastic strain, during the step-by-step fabrication of the LPSCl layer.*

References

[1] S. Micky, E. Simon, J. Todt, K. Vegso, P. Nadazdy, P. Krízik, E. Majkova, E., J. Keckes, J., J. Li, P. Siffalovic, Small. 20 (17) (2024), 2307837.

Electrochemical cycling and multitechnique characterization of $NaCoO_2$ cathodes grown by pulsed laser deposition

Emma López Ortín[1], Pablo Hernández[1], Andrea Marchetti[4], Celia Polop[1,3], Enrique Vasco[4] , Herko van der Meulen[2,3]

[1]Departamento de Física de la Materia Condensada, Universidad Autónoma de Madrid, Spain
[2]Departmento de Física de Materiales, Universidad Autónoma de Madrid, Spain
[3]Condensed Matter Physics Center, Universidad Autónoma de Madrid, Spain
[4]Instituto de Ciencia de Materiales de Madrid, Consejo Superior de Investigaciones Científicas, Spain
Corresponding author: [emma.lopezo@estudiante.uam.es]

$NaCoO_2$ (NCO) has emerged as a promising sodium-based battery electrode and a potential alternative to the widely used $LiCoO_2$ (LCO) [1]. In this work [2], NCO films were synthesized using pulsed laser deposition (PLD), and the assembled cells were electrochemically cycled to different states of charge (SOCs). Afterwards, a multi-technique characterization combining scanning electron microscopy (SEM), atomic force microscopy (AFM) and Raman spectroscopy was performed to study the phase composition, morphology and conducting properties of the cathodes. Electrochemical measurements revealed reversible charge/discharge behavior with an average Coulombic efficiency of ~94 % and volumetric charge capacities up to ~740 mAh/cm^3. Microscopy analyses showed a more homogeneous morphology after cycling, while AFM measurements indicated enhanced conductivity in the desodiated state. Raman spectroscopy identified characteristic peaks associated with O3- and P3-type NCO phases, confirming structural changes induced by sodium extraction and insertion. These results contribute to the development of sodium-ion battery technologies.

References

[1] A. Z. Wathoni et al. ChemPhysMatter 4 (2025) 344-359
[2] E. López Ortín et al. End of Degree Thesis, Universidad Autónoma de Madrid (2026)
[3] H. Rostami et al. Chemical Engineering Journal 495 (2024) 153471
[4] E. J. Fuller et al. ACS Nano 16 (2022) 16363-16371
[5] J. Jamboretz et al. Chem. Matter 36 (2024) 8447-8457

Operando Synchrotron FTIR at the MIRAS Beamline Reveals Structural-Water Dynamics in Prussian Blue Analogues

Alejandro Ramo-Irurre,[1] Ishita Biswas,[1] Carlos Frontera,[1] Ibraheem Yousef,[2] M. Rosa Palacin,[1] Ashley P. Black,[1*]*

[1] Institut de Ciència de Materials de Barcelona, ICMAB-CSIC, Campus UAB, 08193 Bellaterra, Catalonia, Spain.

[2] CELLS - ALBA synchrotron, 08290 Cerdanyola del Vallès, Catalonia, Spain.

Corresponding author: rosa.palacin@icmab.es, ablack@icmab.es

Prussian Blue Analogues (PBAs) have attracted considerable interest as cathode materials for next-generation sodium-ion and multivalent batteries due to their open framework, rapid ion diffusion, structural versatility, and low cost synthesis. However, the role of structural water and its influence on electrochemical performance remains incompletely understood. Here, we combine *operando* Fourier-transform infrared (FTIR) spectroscopy at ALBA's MIRAS beamline[1] with *operando* X-ray diffraction (XRD) to elucidate reaction mechanisms, structural evolution, and water dynamics in PBAs. Continuous monitoring of the cyanide (CN^-) and water (OH^-) stretching vibrations reveals distinct redox mechanisms across different hydrated PBA compositions. In Berlin Green (FeFe-PBA), the reversible shift of the CN^- stretching band from 2113 to 2102 cm^{-1} directly tracks Fe redox activity and spin-state transitions during Na^+ and Ca^{2+} intercalation.[2] Structural water also exhibits composition-dependent behavior. Commercial MnFe-Prussian White undergoes progressive, irreversible water release coupled to structural phase transitions, whereas FeFe-Prussian Blue and Berlin Green seem to exhibit some reversible water dynamics that closely follow the Fe^{2+}/Fe^{3+} redox process and associated lattice-volume changes.[3] These findings showcase *operando* synchrotron FTIR as a unique tool to complement to XRD and XAS and reveal structural-water dynamics largely hidden from conventional *operando* techniques.

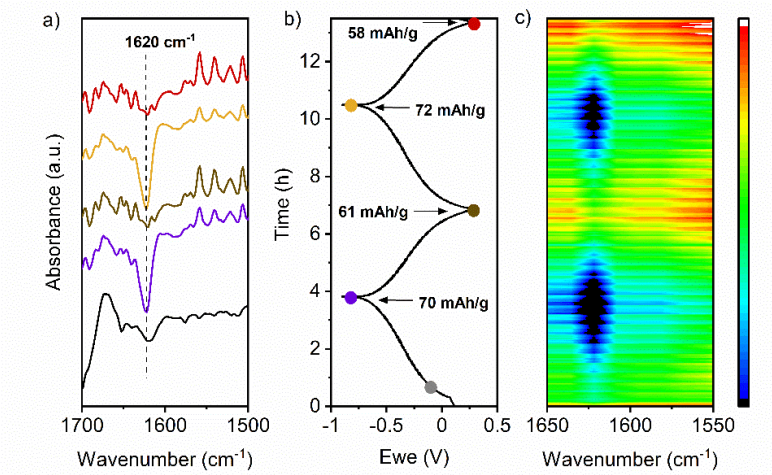

Figure 1. *a) OH^- stretching band (1620 cm^{-1}), b) Electrochemical cycling profile at C/5 and c) contour plot tracking the OH^- band evolution during operando FTIR at ALBA MIRAS beamline on a cell using $Fe[Fe(CN)6]\cdot nH_2O$ as active material in the working electrode, 1M $NaPF_6$ in diglyme electrolyte and activated carbon cloth as counter electrode.*

References

[1] Ashley P. Black, Deyana S. Tchitchekova, Nagaraj Patil, Nicolas Goujon, David Mecerreyes, Rebeca Marcilla, Ibraheem Yousef, and Alexandre Ponrouch *Chemistry of Materials* **2026** *38* (2), 645-656
DOI: 10.1021/acs.chemmater.5c01795

[2] Alejandro Ramo-Irurre, Carlos Frontera, Ashley P. Black, and M. Rosa Palacin *ACS Applied Energy Materials* **2025** *8* (1), 31-35 DOI: 10.1021/acsaem.4c02623

[3] Ishita Biswas, Carlos Frontera, Alejandro Ramo-Irurre, Ashley P. Black, and M. Rosa Palacin *J. Phys. Energy* **2026** *8* 015033 DOI: 10.1088/2515-7655/ae4ff4

Thin-film components and interfacial studies for sodium solid-state batteries

Andrea Marchetti[1], J. Díaz-Sánchez, C. Polop[2,3], E. Vasco[1]

[1]Instituto de Ciencia de Materiales de Madrid, Consejo Superior de Investigaciones Científicas, Madrid, Spain
[2] Universidad Autónoma de Madrid, Departamento de Física de la Materia Condensada, Madrid, Spain
[3] Instituto Universitario de Ciencia de Materiales Nicolás Cabrera (INC), Madrid, Spain

Corresponding author: andrea.marchetti@csic.es

Solid-state batteries (SSBs) are attractive energy-storage systems due to their improved safety and thermal stability compared to conventional liquid-electrolyte batteries. While considerable progress has been achieved for lithium-based SSBs, the development of solid-state sodium-ion batteries (SSNIBs) remains at an early stage despite the abundance and wider availability of sodium compared with lithium. To contribute to this field, we are developing thin-film SSNIB components, including $NaCoO_2$ (NCO) cathodes, NASICON solid electrolytes deposited by Pulsed Laser Deposition (PLD) and metallic anodes fabricated by thermal evaporation. The electrochemical performance of NCO was initially evaluated using a liquid electrolyte (LE), followed by the fabrication and testing of NCO/NASICON bilayers. Although initial cycling attempts were dominated by non-faradaic currents, the system exhibited improved stability after passivation in the presence of species originating from the LE, highlighting the importance of interface engineering in Na-SSBs. As part of the development of metallic anodes for sodium batteries, Sn, Ag and Cu were investigated as model systems during sodiation and desodiation. While the fabrication of thermally evaporated Sn thin-film anodes is already underway, similar studies on Ag and Cu are planned for future work. Hard X-ray Photoelectron Spectroscopy (HAXPES) was employed to investigate the interfacial chemistry associated with sodiation and desodiation processes. HAXPES measurements can provide insight into the evolution of the chemical species formed during cycling and the influence of the metallic substrate on interfacial reactions.

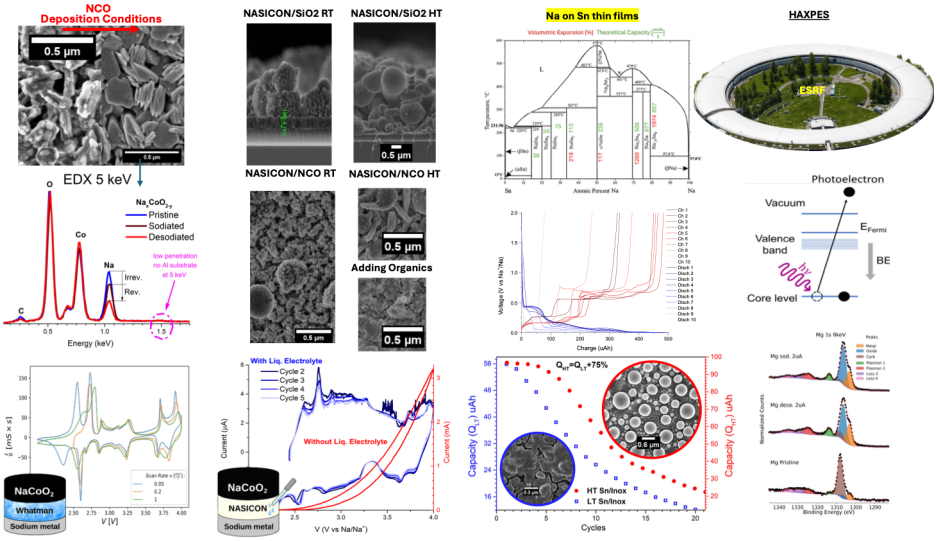

Figure 1. ***Left (top to bottom):*** *Morphological changes in NCO films grown on aluminum resulting from optimizing the PLD conditions; post-mortem energy-dispersive X-ray spectroscopy (EDS) analysis demonstrating the sensitivity of the technique to changes in the state of charge after electrochemical cycling; cyclic voltammetry confirming the O3 crystallographic phase of the sample.* ***Center left:*** *SEM micrographs illustrating the effect of deposition conditions on NASICON deposition on SiO_2 and NCO substrates, and the corresponding surface modifications after exposure to the organic species present in the liquid electrolyte, which contribute to the formation of a passivating solid-electrolyte interface observed during cyclic voltammetry.* ***Center right:*** *Na-Sn phase diagram, charge-discharge profile of a representative Sn thin-film electrode, and the influence of temperature-induced morphological changes on coulombic efficiency.* ***Right:*** *The European Synchrotron Radiation Facility (ESRF), schematic representation of core-level excitation in HAXPES, and deconvolution of the Mg 1s core level for three different samples.*

Determination of the local chemical strain on single crystal LCO by c-AFM

P. Hernández-Martín[1,2], A. Galindo[3], J. Díaz-Sánchez[1,2], G. E. Almanza-Vergara[1,2,3], M. J. Ramírez-Peral[1,3], C. Morant[2,4], E. Vasco[3], C. Polop[1,2,5]

[1]*Condensed Matter Physics Department, Autonomous University of Madrid (UAM), Madrid, Spain*

[2]*Nicolás Cabrera University Institute of Materials Science (INC), UAM, Madrid, Spain*

[3]*Materials Science Institute of Madrid (ICMM), Spanish National Research Council (CSIC), Madrid, Spain*

[4]*Applied Physics Department, Autonomous University of Madrid (UAM), Madrid, Spain*

[5]*Condensed Matter Physics Center (IFIMAC), UAM, Madrid, Spain*

Corresponding author: *pablo.hernandezm@uam.es*

Li_xCoO_2 (LCO) is one of the most widely used cathode materials in lithium-ion batteries due to its high energy density and technological maturity. Unlike most Li-based cathodes, LCO exhibits a negative chemical expansion coefficient in the compositional range $0.6 < x < 1$ and undergoes a transition between two main hexagonal phases: HEX-I, a semiconducting phase at high Li content, and HEX-II, a highly conductive phase at intermediate lithiation levels. These unique structural and electrochemical properties, together with its manufacturability, underpin the widespread success of LCO in commercial batteries [1,2].

In this work, 50 nm-thick epitaxial LCO films were deposited by Pulsed Laser Deposition (PLD) on $SrTiO_3$ (STO) (100) and STO (111) substrates buffered with a 20 nm-thick conductive $SrRuO_3$ (SRO) layer. Galvanostatic cycling was used to reach selected lithiation states (x = 0.6, 0.8, and 1). The epitaxial quality of the films and grain orientation were confirmed by SEM and XRD analyses.

Conductive Atomic Force Microscopy (c-AFM) has emerged as a powerful technique for probing local electrical and mechanical properties of battery materials with nanometer-scale resolution [4]. Here, current mapping and local I-V spectroscopy measurements performed under different normal loading forces are combined to investigate the relationship between local conductivity, lithiation state, and chemically induced strain in epitaxial LCO grains. By exploiting the strong coupling between electronic transport and lattice expansion in LCO, c-AFM provides a route to quantify local chemical strain at the nanoscale.

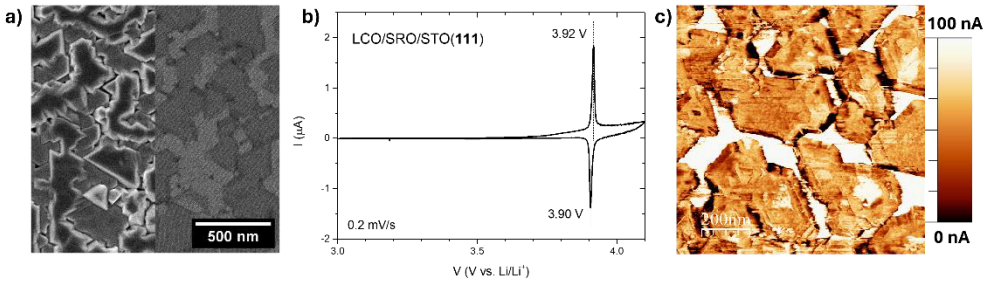

Figure 1. *a) SEM scans of the top view of epitaxially pulsed laser deposited LCO(111). b) Galvanostatic cycle of LCO(111). Oxidation and reduction peak at 3.92V and 3.90V respectively. c) c-AFM current map of LCO(111) scanned with a bias voltage of 1 V. Conductive layer of SRO is observed between the LCO grains*

References

*[1] Y. Li et al., Nano Energy **148**, 2211-2855 (2026). DOI:10.1016/j.nanoen.2025.111644*
*[2] A. Milewska et al., Solid State Ionics **263**, 0167-2738 (2014). DOI:10.1016/j.ssi.2014.05.011*
*[3] M.J. Ramirez-Peral et al., Energy Storage Materials **71**, 2405-8297 (2024). DOI:10.1016/j.ensm.2024.103658*
*[4] E.J. Fuller et al., ACS Nano **25**, 16363-16371 (2022). DOI:10.1021/acsnano.2c05594*
*[5] R. Koerver et al., Energy Environ. Sci. **11**, 2142-2158 (2018). DOI:10.1039/c8ee00907d*

Low-energy electron microscopy study of the growth of M_2Mo3O8 (M = Mn, Fe) on Mo (110)

Kalina Fornal[1], Clara Gutiérrez Cuesta[1], David Arce Solano[2], Anna Mandziak[3], Paweł Nita[3,4], Marcin Szpytma[3], Adolfo del Campo[5], José E. Prieto[1], José F.Marco[1], Juan de la Figuera[1]

[1]Instituto de Química Física Blas Cabrera, c. Serrano 119, 28006 Madrid, Spain
[2]Universidad Complutense de Madrid, Av. Complutense, 28040 Madrid, Spain
[3]National Synchrotron Radiation Centre Solaris, ul. Czerwone Maki 98, 30-392 Kraków, Poland
[4]Faculty of Physics, Astronomy and Applied Computer Science, Jagiellonian University, ul. Prof. S. Łojasiewicza 11, 30-348 Kraków, Poland
[5]Instituto de Cerámica y Vidrio, c. Kelsen 5, 28049 Madrid, Spain

Corresponding author: kfornal@iqf.csic.es

The family of ternary molybdenum oxides, $M_2Mo_3O_8$, where M is a 3d transition metal (TM), has attracted attention as a model system for studying multiferroic properties. The compounds crystalize in a polar hexagonal ($P6_3mc$) structure, in which layers of octahedrally and tetrahedrally coordinated M^{2+} cations alternate with layers of Mo_3O_{13} trimers along the c-axis. At low temperatures, the crystal's intrinsic polarity is strongly coupled to the magnetic ordering of M^{2+} sublattice, resulting in a large and tunable magnetoelectric effect that is strongly dependent on the nature of the cation M. Furthermore, the compounds are associated with areas such as nonreciprocal optics and spin-caloritronics, and recently, have been identified as candidates for altermagnets.

In this work, we present a low electron microscopy study of the high-temperature, molecular-oxygen-assisted growth of two $M_2Mo_3O_8$ family members, $Mn_2Mo_3O_8$ and $Fe_2Mo_3O_8$. The compounds were synthesized by depositing the transition metal only, with the Mo (110) substrate acting as a source of Mo^{4+} cations. A similar phenomenon was previously observed for the heavier member of the 6th group – tungsten, leading to formation of $M^{II}WO_4$ tungstates when depositing a another element on a W (110) surface. However, to the best of our knowledge, such behaviour has never been reported for molybdenum.

A range of techniques were used to elucidate the structure and chemistry of the samples. *In-situ* low-energy electron diffraction (LEED) measurements indicate that the $Mn_2Mo_3O_8$ and $Fe_2Mo_3O_8$ structures - islands and wires – show preferential growth along the [100] and [111] directions of the Mo (110) surface, with the (001) face of the molybdate facing upwards in the case of the islands. Through the laterally-resolved X-ray photoelectron spectroscopy (XPS-PEEM), we confirm the presence of Mo^{4+} in the structures, while X-ray absorption spectroscopy (XAS-PEEM) measurements on the $L_{2,3}$ edges of the transition metals, and the O K edge give us insight into the details of Mo^{4+} and M^{2+} coordination and bonding. Via the use of polarized Raman spectroscopy, we confirm that the compounds crystalize with a $P6_3mc$ symmetry. Finally, we complement the low-electron microscopy study of the morphology with three-dimensional atomic force microscopy (AFM) images of the samples.

References

[1] T. Skála et al., Phys. Chem. Chem. Phys. **13**, 7083 (2011).
[2] K. Fornal et al., J. Mater. Chem. C (2025).